

TIRE CATALOGUE

Passenger Car, SUV and Light Truck



ARISUN

Made in Thailand / North America Version

Company Introduction



TOP 9
No. 9 of Top 75 Global Tire Manufacturers

SINCE 1958
Established in Year 1958

30,000 EMPLOYEES
Support from Over 30,000 Employees

200 MARKETS
Trust from Customers Across More than 200 Markets

Zhongce Rubber Group Co., Ltd (ZC-Rubber) is a global tire company based in Hangzhou, China and was founded in 1958. Over our more than 60 years of history, we experienced continuous growth in quality and reputation to become the Top 10 tire manufacturer worldwide today.

Our engineers with our international R&D team focus on constant technological development and innovation spending millions of US dollars in research and development each year and upgrading our production and testing facilities. The ET Industrial Brain in the production process promises our smart production and guarantee tires with high quality, safety, and value with maximum efficiency.

We have formed an extensive global service network of about 1,200 distributors with 250,000 sales locations in 160 countries. Our subsidiaries in Thailand, Germany, Brazil, and the United States serve customers without any difference in time and language. We are dedicated to better support our suppliers, distributors, and customers through a one-stop service.

Safe and Value are always the key of our company. We take pride in the superior quality of our tire products and the first-rate services. We are still endeavoring to become one of the most respected tire manufacturers globally and craft a better future with all partners and friends.


Most Advanced
Equipment


Best
Raw Material


Leanest
Management


Latest
Technology


Least
Energy Consumption


Most Suitable
Products


COMPANY MISSION


**WE ARE COMMITTED TO
ADVANCING TOWARDS
FUTURE MOBILITY**

COMPANY VISION


**TO BE A GLOBAL LEADING
TYRE MANUFACTURER**



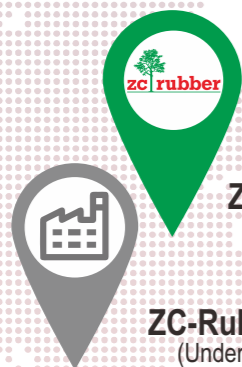

ZC-Rubber America Inc.

ZC-Rubber Mexico
(Under Construction)



ZC-Rubber Brazil Co. Ltd.



ZC-Rubber Europe Technical Center
ZC-Rubber Europe GmbH



ZC-Rubber Thailand Co. Ltd.

ZC-Rubber Indonesia
(Under Construction)



- ZC-Rubber Tianjin
- ZC-Rubber HQ
- ZC-Rubber Haichao
- ZC-Rubber Chaoyang
- ZC-Rubber Jiande
- ZC-Rubber Qingquan
- ZC-Rubber Yonggu
- ZC-Rubber Anji
- ZC-Rubber Jintan
- ZC-Rubber Recycling Tech. Co. Ltd.
- Hangzhou ZC-Rubber Auto Space Co. Ltd.

Strategic Cooperation

ARISUN



OFFICIAL TIRE OF ARSENAL FOOTBALL CLUB



OE CUSTOMERS



KEY ACCOUNTS



KEY SUPPLIERS



CONTENTS

ARISUN

UHP 09

AGGRESSOR Z503

HP 11

AGGRESSOR ZP11

AGGRESSOR ZP01

4x4 15

ARESTA ZG02

H/T 17

ARESTA H/T ZG04

A/T 19

ARESTA A/T ZG06

R/T 21

ARESTA R/T ZG07

M/T 23

ARESTA M/T ZG08

COMMERCIAL LTR 25

Altrans Pro ZX05

ST 27

RADIAL ST-100



UHP



AGGRESSOR Z503



Benefits and Features

- Premium ultra high performance all-season tire with excellent high-speed handling
- Optimized tread block stiffness ensures enhanced performance and tread uniformity for improved handling performance and mileage.
- Asymmetric pattern design ensures improved dry handling and cornering performance
- Hybrid sipes design offer great all-season traction in wet, dry and snowy conditions

M+S

| | |
|--------------|---------|
| Rim Size | 16 - 22 |
| Series | 30 - 55 |
| Speed Rating | V - Y |

AGGRESSOR Z503

| Rim (inch) | Size | Service Index | Tread Depth (32nd) | Standard Rim | Section Width (inch) | Overall Diameter (inch) | Max. Load (lbs) | Max. Air Pressure (psi) | UTQG | TT/TL |
|---------------|---------------|---------------|--------------------|--------------|----------------------|-------------------------|-----------------|-------------------------|---------|-------|
| 16" | 205/45ZR16 XL | 87W | 9.8 | 7.0J | 8.1 | 23.2 | 1201 | 51 | 460 A A | TL |
| | 225/50R16 | 92W | 9.8 | 7.0J | 9.2 | 24.9 | 1389 | 44 | 460 A A | TL |
| 17" | 205/40ZR17 XL | 84W | 9.8 | 7.5J | 8.3 | 23.5 | 1102 | 51 | 460 A A | TL |
| | 215/40ZR17 XL | 87W | 9.8 | 7.5J | 8.6 | 23.8 | 1201 | 51 | 460 A A | TL |
| | 245/40ZR17 XL | 95W | 9.8 | 8.5J | 9.8 | 24.7 | 1521 | 51 | 460 A A | TL |
| | 205/45ZR17 XL | 88W | 9.8 | 7.0J | 8.1 | 24.3 | 1235 | 51 | 460 A A | TL |
| | 215/45ZR17 XL | 91W | 9.8 | 7.0J | 8.4 | 24.6 | 1356 | 51 | 460 A A | TL |
| | 225/45ZR17 XL | 94W | 9.8 | 7.5J | 8.9 | 25.0 | 1477 | 51 | 460 A A | TL |
| | 235/45ZR17 XL | 97W | 9.8 | 8.0J | 9.3 | 25.4 | 1609 | 51 | 460 A A | TL |
| | 245/45ZR17 XL | 99W | 9.8 | 8.0J | 9.6 | 25.7 | 1709 | 51 | 460 A A | TL |
| | 255/45ZR17 XL | 102W | 9.8 | 8.5J | 10.0 | 26.1 | 1874 | 51 | 460 A A | TL |
| | 205/50R17 XL | 93W | 9.8 | 6.5J | 8.4 | 25.1 | 1433 | 51 | 460 A A | TL |
| | 215/50R17 XL | 95W | 9.8 | 7.0J | 8.9 | 25.5 | 1521 | 51 | 460 A A | TL |
| | 225/50R17 XL | 98W | 9.8 | 7.0J | 9.2 | 25.9 | 1653 | 51 | 460 A A | TL |
| | 235/50R17 XL | 100W | 9.8 | 7.5J | 9.6 | 26.3 | 1764 | 51 | 460 A A | TL |
| | 245/50R17 | 99W | 9.8 | 7.5J | 10.0 | 26.7 | 1709 | 44 | 460 A A | TL |
| 18" | 215/55R17 XL | 98W | 9.8 | 7.0J | 8.9 | 26.3 | 1653 | 51 | 460 A A | TL |
| | 225/55R17 | 97W | 9.8 | 7.0J | 9.2 | 26.8 | 1609 | 44 | 460 A A | TL |
| | 235/55R17 XL | 103W | 9.8 | 7.5J | 9.6 | 27.2 | 1929 | 51 | 460 A A | TL |
| | 215/35ZR18 XL | 84W | 9.8 | 7.5J | 8.6 | 23.9 | 1102 | 51 | 460 A A | TL |
| | 225/35ZR18 XL | 87W | 9.8 | 8.0J | 9.1 | 24.2 | 1201 | 51 | 460 A A | TL |
| | 245/35ZR18 XL | 92W | 9.8 | 8.0J | 9.1 | 25.2 | 1389 | 51 | 460 A A | TL |
| | 255/35ZR18 XL | 94W | 9.8 | 8.5J | 9.8 | 24.8 | 1477 | 51 | 460 A A | TL |
| | 265/35ZR18 XL | 97W | 9.8 | 9.0J | 10.2 | 25.0 | 1609 | 51 | 460 A A | TL |
| | 215/40ZR18 XL | 89W | 9.8 | 9.5J | 10.7 | 25.3 | 1279 | 51 | 460 A A | TL |
| | 225/40ZR18 XL | 92W | 9.8 | 7.5J | 8.6 | 24.8 | 1389 | 51 | 460 A A | TL |
| | 235/40ZR18 XL | 95W | 9.8 | 8.0J | 9.1 | 25.1 | 1521 | 51 | 460 A A | TL |
| | 245/40ZR18 XL | 97W | 9.8 | 8.5J | 9.5 | 25.4 | 1609 | 51 | 460 A A | TL |
| | 255/40ZR18 XL | 99W | 9.8 | 8.5J | 9.8 | 25.7 | 1709 | 51 | 460 A A | TL |
| | 215/45ZR18 XL | 93W | 9.8 | 9.0J | 10.2 | 26.0 | 1433 | 51 | 460 A A | TL |
| 19" | 225/45ZR18 XL | 95W | 9.8 | 7.0J | 8.4 | 25.6 | 1521 | 51 | 460 A A | TL |
| | 235/45ZR18 XL | 98W | 9.8 | 7.5J | 8.9 | 25.9 | 1653 | 51 | 460 A A | TL |
| | 245/45ZR18 XL | 100W | 9.8 | 8.0J | 9.3 | 26.3 | 1764 | 51 | 460 A A | TL |
| | 255/45ZR18 XL | 103W | 9.8 | 8.0J | 9.6 | 26.7 | 1929 | 51 | 460 A A | TL |
| | 225/50R18 | 95W | 9.8 | 8.5J | 10.0 | 27.0 | 1521 | 44 | 460 A A | TL |
| | 235/50R18 XL | 101W | 9.8 | 7.0J | 9.2 | 26.9 | 1819 | 51 | 460 A A | TL |
| | 245/50R18 XL | 104W | 9.8 | 7.5J | 9.6 | 27.3 | 1984 | 51 | 460 A A | TL |
| | 225/35ZR19 XL | 88W | 9.8 | 7.5J | 10.0 | 27.7 | 1235 | 51 | 460 A A | TL |
| | 235/35ZR19 XL | 91W | 9.8 | 8.5J | 9.5 | 25.5 | 1356 | 51 | 460 A A | TL |
| | 245/35ZR19 XL | 93W | 9.8 | 8.5J | 9.8 | 25.8 | 1433 | 51 | 460 A A | TL |
| | 255/35ZR19 XL | 96W | 9.8 | 9.0J | 10.2 | 26.0 | 1566 | 51 | 460 A A | TL |
| | 225/40ZR19 XL | 93W | 9.8 | 8.0J | 9.1 | 26.1 | 1433 | 51 | 460 A A | TL |
| | 235/40ZR19 XL | 96W | 9.8 | 8.5J | 9.5 | 26.4 | 1566 | 51 | 460 A A | TL |
| | 245/40ZR19 XL | 98W | 9.8 | 8.5J | 9.8 | 26.7 | 1653 | 51 | 460 A A | TL |
| 255/40ZR19 XL | 100W | 9.8 | 9.0J | 10.2 | 27.0 | 1764 | 51 | 460 A A | TL | |
| 275/40ZR19 XL | 105W | 9.8 | 9.5J | 10.9 | 27.7 | 2039 | 51 | 460 A A | TL | |
| 20" | 225/45ZR19 XL | 96W | 9.8 | 7.5J | 8.9 | 27.0 | 1566 | 51 | 460 A A | TL |
| | 235/45ZR19 XL | 99W | 9.8 | 8.0J | 9.3 | 27.4 | 1709 | 51 | 460 A A | TL |
| | 245/45ZR19 XL | 102W | 9.8 | 8.0J | 9.6 | 27.7 | 1874 | 51 | 460 A A | TL |
| | 255/45ZR19 XL | 104W | 9.8 | 8.5J | 10.0 | 28.1 | 1984 | 51 | 460 A A | TL |
| | 225/55R19 | 99V | 9.8 | 7.0J | 9.2 | 28.8 | 1709 | 44 | 460 A A | TL |
| | 235/55R19 | 101V | 9.8 | 7.5J | 9.6 | 29.2 | 1819 | 44 | 460 A A | TL |
| | 275/30R20 XL | 97Y | 9.8 | 9.5J | 10.9 | 26.5 | 1609 | 51 | 460 A A | TL |
| | 225/35ZR20 XL | 90W | 9.8 | 8.0J | 9.1 | 26.2 | 1323 | 51 | 460 A A | TL |
| | 245/35ZR20 XL | 95W | 9.8 | 8.5J | 9.8 | 26.8 | 1521 | 51 | 460 A A | TL |
| | 255/35ZR20 XL | 97W | 9.8 | 9.0J | 10.2 | 27.0 | 1609 | 51 | 460 A A | TL |
| | 265/35ZR22 XL | 102W | 9.8 | 9.0J | 10.5 | 29.4 | 1874 | 51 | 460 A A | TL |
| | 275/35ZR20 XL | 102W | 9.8 | 9.5J | 10.9 | 27.6 | 1874 | 51 | 460 A A | TL |
| | 245/40ZR20 XL | 99W | 9.8 | 8.5J | 9.8 | 27.7 | 1709 | 51 | 460 A A | TL |
| | 245/45ZR20 XL | 103W | 9.8 | 9.5J | 10.7 | 30.4 | 1929 | 51 | 460 A A | TL |
| 255/45ZR20 XL | 105W | 9.8 | 8.0J | 9.6 | 28.7 | 2039 | 51 | 460 A A | TL | |
| 265/45ZR20 XL | 108W | 9.8 | 8.5J | 10.0 | 29.1 | 2205 | 51 | 460 A A | TL | |
| 22" | 265/40ZR22 XL | 106W | 9.8 | 9.5J | 10.7 | 29.3 | 2094 | 51 | 460 A A | TL |



AGGRESSOR ZP11



Benefits and Features

- High-stiffness central rib ensures precise steering and better handling stability
- Four straight main grooves effectively resist hydroplaning and improves wet traction and safety
- High-density siping increases contact with the road for improved braking and handling in both wet and dry conditions

M+S

| | |
|--------------|---------|
| Rim Size | 14 - 18 |
| Series | 40 - 70 |
| Speed Rating | T - V |

AGGRESSOR ZP11

| Rim (inch) | Size | Service Index | Tread Depth (32nd) | Standard Rim | Section Width (inch) | Overall Diameter (inch) | Max. Load (lbs) | Max. Air Pressure (psi) | UTQG | TT/TL |
|------------|-----------|---------------|--------------------|--------------|----------------------|-------------------------|-----------------|-------------------------|---------|-------|
| 14" | 185/65R14 | 86H | 9.4 | 5.5J | 7.4 | 23.5 | 1168 | 44 | 500 A A | TL |
| | 195/70R14 | 91T | 9.8 | 6.0J | 7.9 | 24.8 | 1356 | 44 | 540 A A | TL |
| | 205/70R14 | 95T | 9.8 | 6.0J | 8.2 | 25.4 | 1521 | 51 | 540 A A | TL |
| 15" | 185/60R15 | 84H | 9.8 | 5.5J | 7.4 | 23.7 | 1102 | 44 | 540 A A | TL |
| | 195/60R15 | 88H | 9.8 | 6.0J | 7.9 | 24.2 | 1235 | 44 | 540 A A | TL |
| | 185/65R15 | 88H | 9.8 | 5.5J | 7.4 | 24.4 | 1235 | 44 | 540 A A | TL |
| | 195/65R15 | 91H | 9.8 | 6.0J | 7.9 | 25.0 | 1356 | 44 | 540 A A | TL |
| | 205/65R15 | 94H | 9.8 | 6.0J | 8.2 | 25.5 | 1477 | 44 | 540 A A | TL |
| | 205/70R15 | 96H | 9.8 | 6.0J | 8.2 | 26.3 | 1565 | 44 | 540 A A | TL |
| | 215/70R15 | 98H | 9.8 | 6.5J | 8.7 | 26.9 | 1653 | 44 | 540 A A | TL |
| 16" | 205/55R16 | 91V | 9.8 | 6.5J | 8.4 | 24.9 | 1356 | 44 | 540 A A | TL |
| | 205/60R16 | 92H | 9.8 | 6.0J | 8.2 | 25.7 | 1389 | 44 | 540 A A | TL |
| | 215/60R16 | 95H | 9.8 | 6.5J | 8.7 | 26.1 | 1521 | 44 | 540 A A | TL |
| | 225/60R16 | 98H | 9.8 | 6.5J | 9.0 | 26.6 | 1653 | 44 | 540 A A | TL |
| | 235/60R16 | 100H | 10.3 | 7.0J | 9.4 | 27.1 | 1764 | 44 | 600 A A | TL |
| | 205/65R16 | 95H | 9.8 | 6.0J | 8.2 | 26.5 | 1521 | 44 | 540 A A | TL |
| | 215/65R16 | 98H | 9.8 | 6.5J | 8.7 | 27.0 | 1653 | 44 | 540 A A | TL |
| | 225/65R16 | 100H | 9.8 | 6.5J | 9.0 | 27.5 | 1764 | 44 | 540 A A | TL |
| | 235/65R16 | 103H | 10.3 | 7.0J | 9.4 | 28.0 | 1929 | 44 | 600 A A | TL |
| 17" | 225/50R17 | 94V | 10.3 | 7.0J | 9.2 | 25.9 | 1477 | 44 | 600 A A | TL |
| | 215/55R17 | 94V | 10.3 | 7.0J | 8.9 | 26.3 | 1477 | 44 | 600 A A | TL |
| | 225/55R17 | 97H | 10.3 | 7.0J | 9.2 | 26.8 | 1609 | 44 | 600 A A | TL |
| | 235/55R17 | 99H | 10.3 | 7.5J | 9.6 | 27.2 | 1709 | 44 | 600 A A | TL |
| | 225/60R17 | 99H | 10.3 | 6.5J | 9.0 | 27.6 | 1709 | 44 | 600 A A | TL |
| | 225/65R17 | 102T | 10.3 | 6.5J | 9.0 | 28.5 | 1874 | 44 | 600 A A | TL |
| | 235/65R17 | 104H | 10.3 | 7.0J | 9.4 | 29.1 | 1984 | 44 | 600 A A | TL |
| 18" | 225/40R18 | 92V | 10.3 | 8.0J | 9.1 | 25.1 | 1389 | 51 | 600 A A | TL |
| | 225/45R18 | 95V | 10.3 | 7.5J | 8.9 | 25.9 | 1521 | 51 | 600 A A | TL |
| | 235/45R18 | 98V | 10.3 | 8.0J | 9.3 | 26.3 | 1653 | 51 | 600 A A | TL |
| | 245/45R18 | 100V | 10.3 | 8.0J | 9.6 | 26.7 | 1764 | 51 | 600 A A | TL |
| | 235/50R18 | 97V | 10.3 | 7.5J | 9.6 | 27.3 | 1609 | 44 | 600 A A | TL |
| 235/65R18 | 106T | 10.3 | 7.0J | 9.4 | 30.0 | 2094 | 44 | 600 A A | TL | |



AGGRESSOR ZP01



Benefits and Features

- High value touring all-season tire with smooth riding
- Variable pitches tread blocks for high stability and reduce noise
- Continuous center rib delivering better straight handling
- Four grooves with open shoulder provides perfect water evacuation

M+S

| | |
|--------------|---------|
| Rim Size | 13 - 18 |
| Series | 40 - 80 |
| Speed Rating | T - V |

AGGRESSOR ZP01

| Rim (inch) | Size | Service Index | Tread Depth (32nd) | Standard Rim | Section Width (inch) | Overall Diameter (inch) | Max. Load (lbs) | Max. Air Pressure (psi) | UTQG | TT/TL |
|------------|--------------|---------------|--------------------|--------------|----------------------|-------------------------|-----------------|-------------------------|---------|---------|
| 13" | 165/65R13 | 77T | 9.4 | 5.0J | 6.7 | 21.4 | 908 | 44 | 500 A A | TL |
| | 175/70R13 | 82T | 9.4 | 5.0B | 7.0 | 22.7 | 1047 | 44 | 500 A A | TL |
| | 185/70R13 | 86T | 9.4 | 5.5J | 7.4 | 23.2 | 1168 | 44 | 500 A A | TL |
| | 155/80R13 | 79T | 9.4 | 4.5B | 6.2 | 22.8 | 963 | 44 | 500 A A | TL |
| | 165/80R13 | 83T | 9.4 | 4.5J | 6.5 | 23.4 | 1074 | 44 | 500 A A | TL |
| 14" | 165/55R14 | 72V | 9.4 | 5.0J | 6.7 | 21.2 | 783 | 44 | 500 A A | TL |
| | 185/60R14 | 82H | 9.4 | 5.5J | 7.4 | 22.8 | 1047 | 44 | 500 A A | TL |
| | 195/60R14 | 86H | 9.8 | 6.0J | 7.9 | 23.2 | 1168 | 44 | 500 A A | TL |
| | 175/65R14 | 82H | 9.4 | 5.0J | 7.0 | 23.0 | 1047 | 44 | 500 A A | TL |
| | 185/65R14 | 86H | 9.4 | 5.5J | 7.4 | 23.5 | 1168 | 44 | 500 A A | TL |
| | 175/70R14 | 84T | 9.4 | 5.0J | 7.0 | 23.7 | 1102 | 44 | 500 A A | TL |
| | 185/70R14 | 88T | 9.4 | 5.5J | 7.4 | 24.3 | 1235 | 44 | 500 A A | TL |
| | 195/70R14 | 91T | 9.8 | 6.0J | 7.9 | 24.8 | 1356 | 44 | 500 A A | TL |
| | 205/70R14 | 95T | 9.8 | 6.0J | 8.2 | 25.4 | 1521 | 44 | 500 A A | TL |
| | 15" | 165/50R15 | 72V | 9.4 | 5.0J | 6.7 | 21.5 | 783 | 44 | 500 A A |
| 195/50R15 | | 82V | 9.8 | 6.0J | 7.9 | 22.7 | 1047 | 44 | 500 A A | TL |
| 185/55R15 | | 82V | 9.4 | 6.0J | 7.6 | 23.0 | 1047 | 44 | 500 A A | TL |
| 195/55R15 | | 85V | 9.8 | 6.0J | 7.9 | 23.4 | 1135 | 44 | 500 A A | TL |
| 185/60R15 | | 84H | 9.4 | 5.5J | 7.4 | 23.7 | 1102 | 44 | 500 A A | TL |
| 195/60R15 | | 88H | 9.8 | 6.0J | 7.9 | 24.2 | 1235 | 44 | 500 A A | TL |
| 205/60R15 | | 91H | 9.8 | 6.0J | 8.2 | 24.7 | 1356 | 44 | 500 A A | TL |
| 215/60R15 | | 94H | 9.8 | 6.5J | 8.7 | 25.2 | 1477 | 44 | 500 A A | TL |
| 175/65R15 | | 84H | 9.4 | 5.0J | 7.0 | 24.0 | 1102 | 44 | 500 A A | TL |
| 185/65R15 | | 88H | 9.4 | 5.5J | 7.4 | 24.4 | 1235 | 44 | 500 A A | TL |
| 195/65R15 | | 91H | 9.8 | 6.0J | 7.9 | 25.0 | 1356 | 44 | 500 A A | TL |
| 205/65R15 | | 94H | 9.8 | 6.0J | 8.2 | 25.5 | 1477 | 44 | 500 A A | TL |
| 205/70R15 | | 96H | 9.8 | 6.0J | 8.2 | 26.3 | 1565 | 44 | 500 A A | TL |
| 215/70R15 | | 98H | 9.8 | 6.5J | 8.7 | 26.9 | 1653 | 44 | 500 A A | TL |
| 16" | | 195/50R16 | 84V | 9.8 | 6.0J | 8.3 | 23.7 | 1102 | 44 | 500 A A |
| | 205/50R16 | 87V | 9.8 | 6.5J | 8.4 | 24.1 | 1201 | 44 | 500 A A | TL |
| | 185/55R16 | 83V | 9.4 | 6.0J | 7.6 | 24.0 | 1074 | 44 | 500 A A | TL |
| | 195/55R16 | 87V | 9.8 | 6.0J | 7.9 | 24.4 | 1201 | 44 | 500 A A | TL |
| | 205/55R16 | 91V | 9.8 | 6.5J | 8.4 | 24.9 | 1356 | 44 | 500 A A | TL |
| | 215/55R16 | 93V | 9.8 | 7.0J | 8.9 | 25.3 | 1433 | 44 | 500 A A | TL |
| | 225/55R16 | 95V | 9.8 | 7.0J | 9.2 | 25.7 | 1521 | 44 | 500 A A | TL |
| | 185/60R16 | 86H | 9.4 | 5.5J | 7.4 | 24.7 | 1168 | 44 | 500 A A | TL |
| | 205/60R16 | 92H | 9.8 | 6.0J | 8.2 | 25.7 | 1389 | 44 | 500 A A | TL |
| | 215/60R16 | 95H | 9.8 | 6.5J | 8.7 | 26.1 | 1521 | 44 | 500 A A | TL |
| | 225/60R16 | 98H | 9.8 | 6.5J | 9.0 | 26.6 | 1653 | 44 | 500 A A | TL |
| | 235/60R16 | 100H | 9.8 | 7.0J | 9.4 | 27.1 | 1764 | 44 | 500 A A | TL |
| | 205/65R16 | 95H | 9.8 | 6.0J | 8.2 | 26.5 | 1521 | 44 | 500 A A | TL |
| | 215/65R16 | 98H | 9.8 | 6.5J | 8.7 | 27.0 | 1653 | 44 | 500 A A | TL |
| | 225/65R16 | 100H | 9.8 | 6.5J | 9.0 | 27.5 | 1764 | 44 | 500 A A | TL |
| 235/65R16 | 103H | 9.8 | 7.0J | 9.4 | 28.0 | 1929 | 44 | 500 A A | TL | |
| 17" | 225/50R17 | 94V | 9.8 | 7.0J | 9.2 | 25.9 | 1477 | 44 | 500 A A | TL |
| | 215/55R17 | 94V | 9.8 | 7.0J | 8.9 | 26.3 | 1477 | 44 | 500 A A | TL |
| | 225/55R17 | 97H | 9.8 | 7.0J | 9.2 | 26.8 | 1609 | 44 | 500 A A | TL |
| | 235/55R17 | 99H | 9.8 | 7.5J | 9.6 | 27.2 | 1709 | 44 | 500 A A | TL |
| | 225/60R17 | 99H | 9.8 | 6.5J | 9.0 | 27.6 | 1709 | 44 | 500 A A | TL |
| | 225/65R17 | 102T | 9.8 | 6.5J | 9.0 | 28.5 | 1874 | 44 | 500 A A | TL |
| | 235/65R17 | 104H | 9.8 | 7.0J | 9.4 | 29.1 | 1984 | 44 | 500 A A | TL |
| 18" | 225/40R18 XL | 92V | 9.8 | 8.0J | 9.1 | 25.1 | 1389 | 51 | 500 A A | TL |
| | 225/45R18 XL | 95V | 9.8 | 7.5J | 8.9 | 25.9 | 1521 | 51 | 500 A A | TL |
| | 235/45R18 XL | 98V | 9.8 | 8.0J | 9.3 | 26.3 | 1653 | 51 | 500 A A | TL |
| | 245/45R18 XL | 100V | 9.8 | 8.0J | 9.6 | 26.7 | 1764 | 51 | 500 A A | TL |
| | 225/50R18 | 95V | 9.8 | 7.0J | 9.2 | 26.9 | 1521 | 44 | 500 A A | TL |
| | 235/50R18 | 97V | 9.8 | 7.5J | 9.6 | 27.3 | 1609 | 44 | 500 A A | TL |
| | 235/65R18 | 106T | 9.8 | 7.0J | 9.4 | 30.0 | 2094 | 44 | 500 A A | TL |



ARESTA ZG02



Benefits and Features

- High-performance SUV tire with comfortable and quiet ride
- High stiffness center rib provides precise steering
- Four straight main grooves efficiently resist hydroplaning & aquaplaning performance up
- Zig-Zag snow sipes allows for improved all-season performance

M+S

| | |
|--------------|----------------|
| Rim Size | 15 - 24 |
| Series | 35 - 75 |
| Speed Rating | S - V |

ARESTA ZG02

| Rim (inch) | Size | Service Index | Tread Depth (32nd) | Standard Rim | Section Width (inch) | Overall Diameter (inch) | Max. Load (lbs) | Max. Air Pressure (psi) | UTQG | TT/TL |
|------------|--------------|---------------|--------------------|--------------|----------------------|-------------------------|-----------------|-------------------------|---------|-------|
| 15" | 225/70R15 | 100T | 10.3 | 6.5J | 9.0 | 27.4 | 1764 | 44 | 500 A A | TL |
| | 235/70R15 | 103T | 10.3 | 7.0J | 9.4 | 28.0 | 1930 | 44 | 500 A A | TL |
| | 265/70R15 | 112T | 10.3 | 8.0J | 10.7 | 29.6 | 2469 | 44 | 500 A A | TL |
| | 215/75R15 | 100T | 10.3 | 6.0J | 8.5 | 27.7 | 1764 | 44 | 500 A A | TL |
| | 225/75R15 | 102T | 10.3 | 6.0J | 8.8 | 28.3 | 1874 | 44 | 500 A A | TL |
| | 235/75R15 | 105H | 10.3 | 6.5J | 9.3 | 28.9 | 2039 | 44 | 500 A A | TL |
| | 265/75R15 | 112T | 10.3 | 7.5J | 10.5 | 30.7 | 2469 | 44 | 500 A A | TL |
| 16" | 255/65R16 | 109H | 10.3 | 7.5J | 10.2 | 29.1 | 2270 | 44 | 500 A A | TL |
| | 205/70R16 | 97T | 10.3 | 6.0J | 8.2 | 27.7 | 1609 | 44 | 500 A A | TL |
| | 215/70R16 | 100T | 10.3 | 6.5J | 8.7 | 27.9 | 1764 | 44 | 500 A A | TL |
| | 225/70R16 | 103H | 10.3 | 6.5J | 9.0 | 28.4 | 1929 | 44 | 500 A A | TL |
| | 235/70R16 | 106H | 10.3 | 7.0J | 9.4 | 29.0 | 2095 | 44 | 500 A A | TL |
| | 245/70R16 | 107T | 10.3 | 7.0J | 9.8 | 29.5 | 2149 | 44 | 500 A A | TL |
| | 255/70R16 | 111H | 10.3 | 7.5J | 10.2 | 30.1 | 2403 | 44 | 500 A A | TL |
| | 265/70R16 | 112T | 10.3 | 8.0J | 10.7 | 30.6 | 2469 | 44 | 500 A A | TL |
| | 275/70R16 | 114T | 10.3 | 8.0J | 11.0 | 31.2 | 2601 | 44 | 500 A A | TL |
| | 225/75R16 | 104H | 10.3 | 6.0J | 8.8 | 29.3 | 1984 | 44 | 500 A A | TL |
| | 235/75R16 | 108T | 10.3 | 6.5J | 9.3 | 29.8 | 2205 | 44 | 500 A A | TL |
| | 245/75R16 | 111T | 10.3 | 7.0J | 9.8 | 30.5 | 2403 | 44 | 500 A A | TL |
| | 265/75R16 | 116T | 10.3 | 7.5J | 10.5 | 31.7 | 2756 | 44 | 500 A A | TL |
| 17" | 215/60R17 | 96H | 10.3 | 6.5J | 8.7 | 27.2 | 1565 | 44 | 500 A A | TL |
| | 225/60R17 | 99T | 10.3 | 6.5J | 9.0 | 27.6 | 1709 | 44 | 500 A A | TL |
| | 235/60R17 | 102T | 10.3 | 7.0J | 9.4 | 28.1 | 1874 | 44 | 500 A A | TL |
| | 255/60R17 XL | 110V | 10.3 | 7.5J | 10.2 | 29.1 | 2337 | 51 | 500 A A | TL |
| | 265/60R17 | 108T | 10.3 | 8.0J | 10.7 | 29.5 | 2205 | 44 | 500 A A | TL |
| | 275/60R17 | 110T | 10.3 | 8.0J | 11.0 | 30.0 | 2337 | 44 | 500 A A | TL |
| | 215/65R17 | 99T | 10.3 | 6.5J | 8.7 | 28.0 | 1709 | 44 | 500 A A | TL |
| | 225/65R17 | 102H | 10.3 | 6.5J | 9.0 | 28.5 | 1875 | 44 | 500 A A | TL |
| | 235/65R17 | 104H | 10.3 | 7.0J | 9.4 | 29.1 | 1985 | 44 | 500 A A | TL |
| | 245/65R17 | 107T | 10.3 | 7.0J | 9.8 | 29.5 | 2149 | 44 | 500 A A | TL |
| | 255/65R17 | 110H | 10.3 | 7.5J | 10.2 | 30.1 | 2337 | 44 | 500 A A | TL |
| | 265/65R17 | 112H | 10.3 | 8.0J | 10.7 | 30.6 | 2469 | 44 | 500 A A | TL |
| | 275/65R17 | 115T | 10.3 | 8.0J | 11.0 | 31.1 | 2679 | 44 | 500 A A | TL |
| | 285/65R17 | 116H | 10.3 | 8.5J | 11.5 | 31.6 | 2756 | 44 | 500 A A | TL |
| | 235/70R17 | 109T | 10.3 | 7.0J | 9.4 | 30.0 | 2271 | 44 | 500 A A | TL |
| | 245/70R17 | 110T | 10.3 | 7.0J | 9.8 | 30.6 | 2337 | 44 | 500 A A | TL |
| | 255/70R17 | 112T | 10.3 | 7.5J | 10.2 | 31.1 | 2469 | 44 | 500 A A | TL |
| 265/70R17 | 115H | 10.3 | 8.0J | 10.7 | 31.7 | 2679 | 44 | 500 A A | TL | |
| 255/75R17 | 115S | 10.3 | 7.0J | 10.0 | 32.0 | 2679 | 44 | 500 A A | TL | |
| 18" | 225/50R18 | 95V | 10.3 | 7.0J | 9.2 | 26.9 | 1521 | 44 | 500 A A | TL |
| | 235/50R18 | 97V | 10.3 | 7.5J | 9.6 | 27.3 | 1609 | 44 | 500 A A | TL |
| | 215/55R18 | 95V | 10.3 | 7.0J | 8.9 | 27.3 | 1521 | 44 | 500 A A | TL |
| | 225/55R18 | 98V | 10.3 | 7.0J | 9.2 | 27.8 | 1653 | 44 | 500 A A | TL |
| | 235/55R18 | 100V | 10.3 | 7.5J | 9.6 | 28.1 | 1764 | 44 | 500 A A | TL |
| | 245/55R18 | 103V | 10.3 | 7.5J | 10.0 | 28.6 | 1929 | 44 | 500 A A | TL |
| | 255/55R18 XL | 109V | 10.3 | 8.0J | 10.4 | 29.0 | 2271 | 51 | 500 A A | TL |
| | 225/60R18 | 100H | 10.3 | 6.5J | 9.0 | 28.6 | 1764 | 44 | 500 A A | TL |
| | 235/60R18 | 103V | 10.3 | 7.0J | 9.4 | 29.1 | 1929 | 44 | 500 A A | TL |
| | 245/60R18 | 105T | 10.3 | 7.0J | 9.8 | 29.6 | 2039 | 44 | 500 A A | TL |
| | 255/60R18 XL | 112V | 10.3 | 7.5J | 10.2 | 30.0 | 2469 | 51 | 500 A A | TL |
| | 265/60R18 XL | 114V | 10.3 | 8.0J | 10.7 | 30.5 | 2601 | 51 | 500 A A | TL |
| | 285/60R18 | 116H | 10.3 | 8.5J | 11.5 | 31.5 | 2756 | 44 | 500 A A | TL |
| | 225/65R18 | 103H | 10.3 | 6.5J | 9.0 | 29.5 | 1929 | 44 | 500 A A | TL |
| | 235/65R18 | 106H | 10.3 | 7.0J | 9.4 | 30.0 | 2094 | 44 | 500 A A | TL |
| | 255/65R18 | 111T | 10.3 | 7.5J | 10.2 | 31.1 | 2403 | 44 | 500 A A | TL |
| | 265/65R18 | 114T | 10.3 | 8.0J | 10.7 | 31.5 | 2601 | 44 | 500 A A | TL |
| | 275/65R18 | 116T | 10.3 | 8.0J | 11.0 | 32.1 | 2756 | 44 | 500 A A | TL |
| | 255/70R18 | 113T | 10.3 | 7.5J | 10.2 | 32.1 | 2535 | 44 | 500 A A | TL |
| 265/70R18 | 116H | 10.3 | 8.0J | 10.7 | 32.6 | 2756 | 44 | 500 A A | TL | |
| 19" | 275/45R19 XL | 108V | 10.3 | 9.0J | 10.7 | 28.8 | 2205 | 51 | 500 A A | TL |
| | 235/50R19 | 99V | 10.3 | 7.5J | 9.6 | 28.3 | 1709 | 44 | 500 A A | TL |
| | 255/50R19 XL | 107V | 10.3 | 8.0J | 10.4 | 29.1 | 2149 | 51 | 500 A A | TL |
| | 225/55R19 | 99V | 10.3 | 7.0J | 9.2 | 28.8 | 1709 | 44 | 500 A A | TL |
| | 245/55R19 | 103V | 10.3 | 7.5J | 10.0 | 29.6 | 1929 | 44 | 500 A A | TL |
| | 255/55R19 XL | 111V | 10.3 | 8.0J | 10.4 | 30.0 | 2403 | 51 | 500 A A | TL |
| | 255/60R19 | 109H | 10.3 | 7.5J | 10.2 | 31.1 | 2271 | 44 | 500 A A | TL |
| 20" | 255/40R20 | 101V | 10.3 | 9.0J | 10.2 | 28.0 | 1819 | 51 | 500 A A | TL |
| | 275/40R20 XL | 106V | 10.3 | 9.5J | 10.9 | 28.7 | 2094 | 51 | 500 A A | TL |
| | 275/45R20 XL | 110V | 10.3 | 9.0J | 10.7 | 29.8 | 2337 | 51 | 500 A A | TL |
| | 245/50R20 | 102V | 10.3 | 7.5J | 10.0 | 29.7 | 1874 | 44 | 500 A A | TL |
| | 255/55R20 | 107H | 10.3 | 8.0J | 10.4 | 31.0 | 2149 | 44 | 500 A A | TL |
| | 265/50R20 XL | 111V | 10.3 | 8.5J | 10.9 | 30.5 | 2403 | 51 | 500 A A | TL |
| | 285/50R20 XL | 116H | 10.3 | 9.0J | 11.7 | 31.3 | 2756 | 51 | 500 A A | TL |
| | 235/55R20 | 102H | 10.3 | 7.5J | 9.6 | 30.2 | 1874 | 44 | 500 A A | TL |
| | 255/55R20 | 107H | 10.3 | 8.0J | 10.4 | 31.0 | 2271 | 44 | 500 A A | TL |
| | 275/55R20 XL | 117V | 10.3 | 8.5J | 11.2 | 31.9 | 2833 | 51 | 500 A A | TL |
| 275/60R20 | 115H | 10.3 | 8.0J | 11.0 | 33.0 | 2679 | 44 | 500 A A | TL | |
| 22" | 305/40R22 XL | 114V | 10.3 | 11.0J | 12.3 | 31.6 | 2337 | 51 | 500 A A | TL |
| | 285/45R22 | 114H | 10.3 | 9.5J | 11.2 | 32.1 | 2601 | 44 | 500 A A | TL |
| | 305/45R22 XL | 118V | 10.3 | 10.0J | 11.9 | 32.8 | 2910 | 51 | 500 A A | TL |
| 24" | 305/35R24 XL | 112V | 10.3 | 11.0J | 12.3 | 32.0 | 2469 | 51 | 500 A A | TL |



ARESTA H/T ZG04



Benefits and Features

- Premium all-season H/T tire with remarkable mileage
- All-season tread design with performance for highway driving and long tire life
- Double-ply casing construction handles heavy loads at highway speed and delivers outstanding durability
- Double steel belts plies and double full jointless nylon cap plies improve handling stability and durability
- Wide circumferential grooves help to evacuate water quickly and efficiently

M+S

| | |
|--------------|---------|
| Rim Size | 16 - 18 |
| Series | 70 - 85 |
| Speed Rating | Q |

ARESTA H/T ZG04

| Rim (inch) | Size | LR/PR | Service Index | Tread Depth (32nd) | Standard Rim | Section Width (inch) | Overall Diameter (inch) | Max. Load (lbs) | Max. Air Pressure (psi) | TT/TL |
|------------|-------------|--------|---------------|--------------------|--------------|----------------------|-------------------------|-----------------|-------------------------|-------|
| 16" | LT225/75R16 | E/10PR | 115/112Q | 14.5 | 6.0J | 8.8 | 29.3 | 2680/2470 | 80 | TL |
| | LT245/75R16 | E/10PR | 120/116Q | 14.5 | 7.0J | 9.8 | 30.5 | 3042/2778 | 80 | TL |
| | LT265/75R16 | E/10PR | 123/120Q | 14.5 | 7.5J | 10.5 | 31.7 | 3415/3085 | 80 | TL |
| | LT215/85R16 | E/10PR | 115/112Q | 14.5 | 6.0J | 8.5 | 30.4 | 2680/2470 | 80 | TL |
| | LT235/85R16 | E/10PR | 120/116Q | 14.5 | 6.5J | 9.3 | 31.7 | 3042/2778 | 80 | TL |
| 17" | LT245/70R17 | E/10PR | 119/116Q | 14.5 | 7.0J | 9.8 | 30.6 | 3000/2755 | 80 | TL |
| | LT265/70R17 | E/10PR | 123/120Q | 14.5 | 8.0J | 10.7 | 31.7 | 3415/3085 | 80 | TL |
| | LT245/75R17 | E/10PR | 121/118Q | 14.5 | 7.0J | 9.8 | 31.5 | 3195/2910 | 80 | TL |
| | LT235/80R17 | E/10PR | 120/117Q | 14.5 | 6.5J | 9.3 | 31.8 | 3085/2835 | 80 | TL |
| 18" | LT265/70R18 | E/10PR | 124/121Q | 14.5 | 8.0J | 10.7 | 32.6 | 3525/3195 | 80 | TL |
| | LT275/70R18 | E/10PR | 125/122Q | 14.5 | 8.0J | 11.0 | 33.2 | 3640/3305 | 80 | TL |



ARESTA A/T ZG06



Benefits and Features

- Premium all-terrain tire with a strong focus on wet performance, durability and treadwear life
- New tread compound and pattern design guarantee a quiet and comfortable ride on the road and an excellent grip performance off the road
- Polygonal pattern block increases rigidity for excellent handling stability and off-road traction
- More lateral wave sipes and evenly distributed void area enhances on and off-road traction reducing irregular wear

M+S


| | |
|--------------|----------------|
| Rim Size | 15 - 22 |
| Series | 45 - 85 |
| Speed Rating | Q - V |

ARESTA A/T ZG06

| Rim (inch) | Size | LR/PR | Service Index | Tread Depth (32nd) | Standard Rim | Section Width (inch) | Overall Diameter (inch) | Max. Load (lbs) | Max. Air Pressure (psi) | UTQG | TT/TL | |
|-------------|---------------|---------------|---------------|--------------------|--------------|----------------------|-------------------------|-----------------|-------------------------|---------|-------|----|
| 15" | 265/70R15 | / | 112T | 13.6 | 8.0J | 10.7 | 29.6 | 2469 | 44 | 500 A A | TL | |
| | 235/75R15 | / | 109S | 12.0 | 6.5J | 9.3 | 28.9 | 2271 | 51 | 500 A A | TL | |
| | 30x9.50R15LT | C/6PR | 104S | 15.7 | 7.5J | 9.4 | 28.5 | 1985 | 50 | / / / | TL | |
| | 31x10.50R15LT | C/6PR | 109S | 15.7 | 8.5J | 10.6 | 30.5 | 2270 | 50 | / / / | TL | |
| | LT235/75R15 | C/6PR | 104/101S | 14.5 | 6.5J | 9.3 | 28.9 | 1985/1820 | 50 | / / / | TL | |
| 16" | 215/70R16 | / | 100S | 12.0 | 6.5J | 8.7 | 27.9 | 1764 | 44 | 500 A A | TL | |
| | 225/70R16 | / | 103S | 12.0 | 6.5J | 9.0 | 28.4 | 1929 | 44 | 500 A A | TL | |
| | 235/70R16 | / | 106S | 12.0 | 7.0J | 9.4 | 29.0 | 2271 | 44 | 500 A A | TL | |
| | 245/70R16 XL | / | 111S | 13.6 | 7.0J | 9.8 | 29.5 | 2403 | 51 | 500 A A | TL | |
| | 255/70R16 | / | 111T | 13.6 | 7.5J | 10.2 | 30.1 | 2403 | 44 | 500 A A | TL | |
| | 265/70R16 | / | 112S | 13.6 | 8.0J | 10.7 | 30.6 | 2469 | 44 | 500 A A | TL | |
| | 245/75R16 | / | 111S | 13.6 | 7.0J | 9.8 | 30.5 | 2403 | 44 | 500 A A | TL | |
| | 265/75R16 | / | 116S | 13.6 | 7.5J | 10.5 | 31.7 | 2756 | 44 | 500 A A | TL | |
| | LT305/70R16 | E/10PR | 124/121Q | 15.7 | 9.0J | 12.2 | 32.8 | 3525/3195 | 65 | / / / | TL | |
| | LT225/75R16 | E/10PR | 115/112S | 14.5 | 6.0J | 8.8 | 29.3 | 2680/2470 | 80 | / / / | TL | |
| | LT245/75R16 | E/10PR | 120/116S | 15.7 | 7.0J | 9.8 | 30.5 | 3042/2778 | 80 | / / / | TL | |
| | LT265/75R16 | E/10PR | 123/120S | 15.7 | 7.5J | 10.5 | 31.7 | 3415/3085 | 80 | / / / | TL | |
| | LT285/75R16 | E/10PR | 126/123R | 15.7 | 8.0J | 11.3 | 32.8 | 3750/3415 | 80 | / / / | TL | |
| | LT315/75R16 | E/10PR | 127/124Q | 15.7 | 8.5J | 12.3 | 34.6 | 3860/3525 | 65 | / / / | TL | |
| | LT215/85R16 | E/10PR | 115/112S | 14.5 | 6.0J | 8.5 | 30.4 | 2680/2470 | 80 | / / / | TL | |
| LT235/85R16 | E/10PR | 120/116S | 15.7 | 6.5J | 9.3 | 31.7 | 3042/2778 | 80 | / / / | TL | | |
| 17" | 235/65R17 | / | 104S | 12.0 | 7.0J | 9.4 | 29.1 | 1984 | 44 | 500 A A | TL | |
| | 245/65R17 | / | 107S | 13.6 | 7.0J | 9.8 | 29.5 | 2149 | 44 | 500 A A | TL | |
| | 255/65R17 | / | 110T | 13.6 | 7.5J | 10.2 | 30.1 | 2337 | 44 | 500 A A | TL | |
| | 265/65R17 | / | 112S | 13.6 | 8.0J | 10.7 | 30.6 | 2469 | 44 | 500 A A | TL | |
| | 235/70R17 | / | 111T | 12.0 | 7.0J | 9.4 | 30.0 | 2271 | 51 | 500 A A | TL | |
| | 245/70R17 | / | 110T | 13.6 | 7.0J | 9.8 | 30.6 | 2337 | 44 | 500 A A | TL | |
| | 255/70R17 | / | 112T | 13.6 | 7.5J | 10.2 | 31.1 | 2469 | 44 | 500 A A | TL | |
| | 265/70R17 | / | 115S | 13.6 | 8.0J | 10.7 | 31.7 | 2679 | 44 | 500 A A | TL | |
| | 285/70R17 | / | 117T | 13.6 | 8.5J | 11.5 | 32.8 | 2756 | 44 | 500 A A | TL | |
| | 235/75R17 | / | 109T | 12.0 | 6.5J | 9.3 | 30.9 | 2271 | 44 | 500 A A | TL | |
| | 245/75R17 | / | 112T | 13.6 | 7.0J | 9.8 | 31.5 | 2469 | 44 | 500 A A | TL | |
| | 255/75R17 | / | 115T | 13.6 | 7.0J | 10.0 | 32.0 | 2679 | 44 | 500 A A | TL | |
| | 33x12.50R17LT | E/10PR | 120Q | 15.7 | 10.0J | 12.5 | 32.5 | 3085 | 65 | / / / | TL | |
| | 35x12.50R17LT | E/10PR | 125Q | 15.7 | 10.0J | 12.5 | 34.5 | 3640 | 65 | / / / | TL | |
| | LT245/70R17 | E/10PR | 119/116S | 15.7 | 7.0J | 9.8 | 30.6 | 3000/2755 | 80 | / / / | TL | |
| | LT265/70R17 | E/10PR | 123/120S | 15.7 | 8.0J | 10.7 | 31.7 | 3415/3085 | 80 | / / / | TL | |
| | LT285/70R17 | E/10PR | 126/123Q | 15.7 | 8.5J | 11.5 | 32.8 | 3750/3415 | 80 | / / / | TL | |
| | LT315/70R17 | E/10PR | 126/123S | 15.7 | 9.5J | 12.7 | 34.4 | 3750/3415 | 65 | / / / | TL | |
| LT245/75R17 | E/10PR | 121/118S | 15.7 | 7.0J | 9.8 | 31.5 | 3195/2910 | 80 | / / / | TL | | |
| LT285/75R17 | E/10PR | 128/125S | 15.7 | 8.0J | 11.3 | 33.9 | 3970/3640 | 80 | / / / | TL | | |
| LT235/80R17 | E/10PR | 120/117R | 15.7 | 6.5J | 9.3 | 31.8 | 3085/2835 | 80 | / / / | TL | | |
| 18" | 33x12.50R18LT | E/10PR | 118Q | 15.7 | 10.0J | 12.5 | 32.5 | 2910 | 65 | / / / | TL | |
| | 35x12.50R18LT | E/10PR | 123R | 15.7 | 10.0J | 12.5 | 34.5 | 3415 | 65 | / / / | TL | |
| | 255/55R18 XL | / | 109H | 12.0 | 8.0J | 10.4 | 29.0 | 2271 | 51 | 500 A A | TL | |
| | 265/60R18 | / | 110T | 13.6 | 8.0J | 10.7 | 30.5 | 2337 | 44 | 500 A A | TL | |
| | 285/60R18 | / | 116T | 13.6 | 8.5J | 11.5 | 31.5 | 2756 | 44 | 500 A A | TL | |
| | 265/65R18 | / | 114T | 13.6 | 8.0J | 10.7 | 31.5 | 2601 | 44 | 500 A A | TL | |
| | 275/65R18 | / | 116T | 13.6 | 8.0J | 11.0 | 32.1 | 2756 | 44 | 500 A A | TL | |
| | 255/70R18 | / | 113T | 13.6 | 7.5J | 10.2 | 32.1 | 2535 | 44 | 500 A A | TL | |
| | 265/70R18 | / | 116T | 13.6 | 8.0J | 10.7 | 32.6 | 2756 | 44 | 500 A A | TL | |
| | LT265/65R18 | E/10PR | 122/119R | 15.7 | 8.0J | 10.7 | 31.5 | 3305/3000 | 80 | / / / | TL | |
| | LT275/65R18 | E/10PR | 123/120S | 15.7 | 8.0J | 11.0 | 32.1 | 3415/3085 | 80 | / / / | TL | |
| | LT285/65R18 | E/10PR | 125/122S | 15.7 | 8.5J | 11.5 | 32.6 | 3640/3305 | 80 | / / / | TL | |
| | LT265/70R18 | E/10PR | 124/121S | 15.7 | 8.0J | 10.7 | 32.6 | 3525/3195 | 80 | / / / | TL | |
| | LT275/70R18 | E/10PR | 125/122S | 15.7 | 8.0J | 11.0 | 33.2 | 3640/3305 | 80 | / / / | TL | |
| | LT295/70R18 | E/10PR | 129/126S | 15.7 | 8.5J | 11.8 | 34.3 | 4080/3750 | 80 | / / / | TL | |
| LT285/75R18 | E/10PR | 129/126S | 15.7 | 8.0J | 11.3 | 34.8 | 4080/3750 | 80 | / / / | TL | | |
| 20" | 265/50R20 XL | / | 111T | 12.0 | 8.5J | 10.9 | 30.5 | 2403 | 51 | 500 A A | TL | |
| | 285/50R20 XL | / | 116V | 12.0 | 9.0J | 11.7 | 31.3 | 2756 | 51 | 500 A A | TL | |
| | 275/55R20 | / | 113S | 12.0 | 8.5J | 11.2 | 31.9 | 2535 | 44 | 500 A A | TL | |
| | 285/55R20 | / | 114T | 12.0 | 9.0J | 11.7 | 32.4 | 2601 | 44 | 500 A A | TL | |
| | 275/60R20 | / | 115T | 13.6 | 8.0J | 11.0 | 33.0 | 2679 | 44 | 500 A A | TL | |
| | 33x12.50R20LT | F/12PR | 119Q | 15.7 | 10.0J | 12.5 | 32.5 | 3000 | 80 | / / / | TL | |
| | 35x12.50R20LT | F/12PR | 125Q | 15.7 | 10.0J | 12.5 | 34.5 | 3640 | 80 | / / / | TL | |
| | 37x12.50R20LT | E/10PR | 126Q | 15.7 | 10.0J | 12.5 | 36.5 | 3750 | 65 | / / / | TL | |
| | LT275/55R20 | E/10PR | 120/117T | 15.7 | 8.5J | 11.2 | 31.9 | 3085/2835 | 80 | / / / | TL | |
| | LT285/55R20 | E/10PR | 122/119S | 15.7 | 9.0J | 11.7 | 32.4 | 3305/3000 | 80 | / / / | TL | |
| | LT305/55R20 | E/10PR | 121/118Q | 15.7 | 9.5J | 12.4 | 33.2 | 3195/2910 | 65 | / / / | TL | |
| | LT265/60R20 | E/10PR | 121/118S | 15.7 | 8.0J | 10.7 | 32.5 | 3195/2910 | 80 | / / / | TL | |
| | LT275/60R20 | E/10PR | 123/120T | 15.7 | 8.0J | 11.0 | 33.0 | 3415/3085 | 80 | / / / | TL | |
| | LT285/60R20 | E/10PR | 125/122S | 15.7 | 8.5J | 11.5 | 33.5 | 3640/3305 | 80 | / / / | TL | |
| | LT275/65R20 | E/10PR | 126/123S | 15.7 | 8.0J | 11.0 | 34.1 | 3750/3415 | 80 | / / / | TL | |
| | LT295/65R20 | E/10PR | 129/126S | 15.7 | 8.5J | 11.8 | 35.1 | 4080/3750 | 80 | / / / | TL | |
| | 22" | 33x12.50R22LT | F/12PR | 114Q | 15.7 | 10.0J | 12.5 | 32.5 | 2600 | 80 | / / / | TL |
| | | 35x12.50R22LT | F/12PR | 121Q | 15.7 | 10.0J | 12.5 | 34.5 | 3195 | 80 | / / / | TL |
| 285/45R22 | | / | 114H | 12.0 | 9.5J | 11.2 | 32.1 | 2601 | 51 | 500 A A | TL | |



ARESTA R/T ZG07



Benefits and Features

- Premium rugged-terrain tire with exceptional off-road performance coupled with on-road comfort and sophistication
- High volume pattern design ensures remarkable treadwear
- Staggered shoulder lugs enhance off-road traction with biting edges
- Aggressive sidewall design offer customization with a distinct look on each side of the tire

M+S


| | |
|--------------|---------|
| Rim Size | 17 - 22 |
| Series | 55 - 80 |
| Speed Rating | Q - T |

ARESTA R/T ZG07

| Rim (inch) | Size | LR/PR | Service Index | Tread Depth (32nd) | Standard Rim | Section Width (inch) | Overall Diameter (inch) | Max. Load (lbs) | Max. Air Pressure (psi) | UTQG | TT/TL |
|------------|---------------|--------|---------------|--------------------|--------------|----------------------|-------------------------|-----------------|-------------------------|---------|-------|
| 17" | 33×12.50R17LT | E/10PR | 120Q | 15.7 | 10.0J | 12.5 | 32.5 | 3085 | 65 | / / / | TL |
| | 35×12.50R17LT | E/10PR | 125Q | 15.7 | 10.0J | 12.5 | 34.5 | 3640 | 65 | / / / | TL |
| | 37×12.50R17LT | E/10PR | 128Q | 15.7 | 10.0J | 12.5 | 36.5 | 3970 | 65 | / / / | TL |
| | LT265/70R17 | E/10PR | 123/120Q | 15.7 | 8.0J | 10.7 | 31.7 | 3415/3085 | 80 | / / / | TL |
| | LT285/70R17 | E/10PR | 126/123Q | 15.7 | 8.5J | 11.5 | 32.8 | 3750/3415 | 80 | / / / | TL |
| | LT255/80R17 | E/10PR | 123/120Q | 15.7 | 7.0J | 10.0 | 33.1 | 3415/3085 | 80 | / / / | TL |
| 18" | 33×12.50R18LT | E/10PR | 118Q | 15.7 | 10.0J | 12.5 | 32.5 | 2910 | 65 | / / / | TL |
| | 35×12.50R18LT | E/10PR | 123Q | 15.7 | 10.0J | 12.5 | 34.5 | 3415 | 65 | / / / | TL |
| | LT275/65R18 | E/10PR | 123/120Q | 15.7 | 8.0J | 11.0 | 32.1 | 3415/3085 | 80 | / / / | TL |
| | LT275/70R18 | E/10PR | 125/122Q | 15.7 | 8.0J | 11.0 | 33.2 | 3640/3305 | 80 | / / / | TL |
| | LT295/70R18 | E/10PR | 129/126Q | 15.7 | 8.5J | 11.8 | 34.3 | 4080/3750 | 80 | / / / | TL |
| | LT285/75R18 | E/10PR | 129/126Q | 15.7 | 8.0J | 11.3 | 34.8 | 4080/3750 | 80 | / / / | TL |
| 20" | 275/55R20 | / | 117T | 13.9 | 8.5J | 11.2 | 31.9 | 2833 | 51 | 500 A B | TL |
| | 275/60R20 | / | 116T | 13.9 | 8.0J | 11.0 | 33.0 | 2756 | 51 | 500 A B | TL |
| | 33×12.50R20LT | E/10PR | 114Q | 15.7 | 10.0J | 12.5 | 32.5 | 2600 | 65 | / / / | TL |
| | 35×12.50R20LT | E/10PR | 121Q | 15.7 | 10.0J | 12.5 | 34.5 | 3195 | 65 | / / / | TL |
| | 37×12.50R20LT | E/12PR | 128Q | 15.7 | 10.0J | 12.5 | 36.5 | 3970 | 80 | / / / | TL |
| | 37×13.50R20LT | E/12PR | 128Q | 15.7 | 11.0J | 13.6 | 36.5 | 3970 | 80 | / / / | TL |
| | LT285/55R20 | E/10PR | 122/119Q | 15.7 | 9.0J | 11.7 | 32.4 | 3305/3000 | 80 | / / / | TL |
| | LT305/55R20 | E/12PR | 125/122Q | 15.7 | 9.5J | 12.4 | 33.2 | 3640/3305 | 80 | / / / | TL |
| | LT295/60R20 | E/10PR | 126/123Q | 15.7 | 8.5J | 11.8 | 33.9 | 3750/3415 | 80 | / / / | TL |
| | LT275/65R20 | E/10PR | 126/123Q | 15.7 | 8.0J | 11.0 | 34.1 | 3750/3415 | 80 | / / / | TL |
| 22" | LT295/65R20 | E/10PR | 129/126Q | 15.7 | 8.5J | 11.8 | 35.1 | 4080/3750 | 80 | / / / | TL |
| | 33×12.50R22LT | E/10PR | 109Q | 15.7 | 10.0J | 12.5 | 32.5 | 2270 | 65 | / / / | TL |
| | 35×12.50R22LT | E/10PR | 117Q | 15.7 | 10.0J | 12.5 | 34.5 | 2835 | 65 | / / / | TL |
| | 37×12.50R22LT | E/12PR | 127Q | 15.7 | 10.0J | 12.5 | 36.5 | 3860 | 80 | / / / | TL |



ARESTA M/T ZG08



Benefits and Features

- Premium mud-terrain tire with best grip for off-road environments
- Robust tread design promise excellent traction on unpaved road
- Stone ejectors protect the tread grooves against stone drilling and puncturing
- Aggressive sidewall design enhances traction and side impact protection

M+S


| | |
|--------------|---------|
| Rim Size | 15 - 22 |
| Series | 55 - 85 |
| Speed Rating | Q |

ARESTA M/T ZG08

| Rim (inch) | Size | LR/PR | Service Index | Tread Depth (32nd) | Standard Rim | Section Width (inch) | Overall Diameter (inch) | Max. Load (lbs) | Max. Air Pressure (psi) | TT/TL |
|------------|---------------|--------|---------------|--------------------|--------------|----------------------|-------------------------|-----------------|-------------------------|-------|
| 15" | 30×9.50R15LT | C/6PR | 104Q | 18.9 | 7.5J | 9.4 | 29.5 | 1985 | 50 | TL |
| | 31×10.50R15LT | C/6PR | 109Q | 18.9 | 8.5J | 10.6 | 30.5 | 2270 | 50 | TL |
| | 32×11.50R15LT | C/6PR | 113Q | 18.9 | 9.0J | 11.4 | 31.5 | 2535 | 50 | TL |
| | 33×12.50R15LT | C/6PR | 108Q | 18.9 | 10.0J | 12.5 | 32.5 | 2205 | 35 | TL |
| | 35×12.50R15LT | C/6PR | 113Q | 18.9 | 10.0J | 12.5 | 34.5 | 2535 | 35 | TL |
| | LT235/75R15 | C/6PR | 104/101Q | 18.9 | 6.5J | 9.3 | 28.9 | 1985/1820 | 50 | TL |
| 16" | LT245/75R16 | E/10PR | 120/116Q | 18.9 | 7.0J | 9.8 | 30.5 | 3042/2778 | 80 | TL |
| | LT265/75R16 | E/10PR | 123/120Q | 18.9 | 7.5J | 10.5 | 31.7 | 3415/3085 | 80 | TL |
| | LT285/75R16 | E/10PR | 126/123Q | 18.9 | 8.0J | 11.3 | 32.8 | 3750/3415 | 80 | TL |
| | LT315/75R16 | E/10PR | 127/124Q | 18.9 | 8.5J | 12.3 | 34.6 | 3860/3525 | 65 | TL |
| | LT235/85R16 | E/10PR | 120/116Q | 18.9 | 6.5J | 9.3 | 31.7 | 3042/2778 | 80 | TL |
| 17" | 33×12.50R17LT | D/8PR | 114Q | 18.9 | 10.0J | 12.5 | 32.5 | 2600 | 50 | TL |
| | 35×12.50R17LT | E/10PR | 125Q | 18.9 | 10.0J | 12.5 | 34.5 | 3640 | 65 | TL |
| | LT265/70R17 | E/10PR | 123/120Q | 18.9 | 8.0J | 10.7 | 31.7 | 3415/3085 | 80 | TL |
| | LT285/70R17 | E/10PR | 126/123Q | 18.9 | 8.5J | 11.5 | 32.8 | 3750/3415 | 80 | TL |
| | LT255/75R17 | C/6PR | 108/111Q | 18.9 | 7.0J | 10.0 | 32.0 | 2405/2205 | 50 | TL |
| | LT235/80R17 | E/10PR | 120/117Q | 18.9 | 6.5J | 9.3 | 31.8 | 3085/2835 | 80 | TL |
| 18" | 33×12.50R18LT | E/10PR | 118Q | 18.9 | 10.0J | 12.5 | 32.5 | 2910 | 65 | TL |
| | 35×12.50R18LT | E/10PR | 123Q | 18.9 | 10.0J | 12.5 | 34.5 | 3415 | 65 | TL |
| | LT275/65R18 | E/10PR | 123/120Q | 18.9 | 8.0J | 11.0 | 32.1 | 3415/3085 | 80 | TL |
| | LT275/70R18 | E/10PR | 125/122Q | 18.9 | 8.0J | 11.0 | 33.2 | 3640/3305 | 80 | TL |
| 20" | 33×12.50R20LT | F/12PR | 119Q | 18.9 | 10.0J | 12.5 | 32.5 | 3000 | 80 | TL |
| | 35×12.50R20LT | F/12PR | 125Q | 18.9 | 10.0J | 12.5 | 34.5 | 3640 | 80 | TL |
| | 37×13.50R20LT | F/12PR | 128Q | 18.9 | 11.0J | 13.6 | 36.5 | 3970 | 80 | TL |
| | LT305/55R20 | F/12PR | 124/121Q | 18.9 | 9.5J | 12.4 | 33.2 | 3525/3195 | 80 | TL |
| | LT275/65R20 | E/10PR | 125/126Q | 18.9 | 8.0J | 11.0 | 34.1 | 3750/3415 | 80 | TL |
| 22" | 33×12.50R22LT | F/12PR | 114Q | 18.9 | 10.0J | 12.5 | 32.5 | 2600 | 80 | TL |
| | 35×12.50R22LT | F/12PR | 121Q | 18.9 | 10.0J | 12.5 | 34.5 | 3195 | 80 | TL |
| | 37×13.50R22LT | F/12PR | 128Q | 18.9 | 11.0J | 13.6 | 36.5 | 3970 | 80 | TL |



Altrans Pro ZX05



Benefits and Features

- Balanced pattern arrangement enhances traction for superior performance
- Advanced profile design ensures extended tire life
- Improved casing structure delivers exceptional durability

M+S


| | |
|--------------|---------|
| Rim Size | 14 - 16 |
| Series | 65 - 75 |
| Speed Rating | Q - T |

Altrans Pro ZX05

| Rim (inch) | Size | LR/PR | Service Index | Tread Depth (32nd) | Standard Rim | Section Width (inch) | Overall Diameter (inch) | Max. Load (lbs) | Max. Air Pressure (psi) | TT/TL |
|------------|------------|--------|---------------|--------------------|--------------|----------------------|-------------------------|-----------------|-------------------------|-------|
| 14" | 185R14C | D/8PR | 102/100R | 11.3 | 5.5J | 7.4 | 25.6 | 1875/1765 | 65 | TL |
| | 195R14C | D/8PR | 106/104Q | 11.3 | 5.5J | 7.8 | 26.2 | 2095/1985 | 65 | TL |
| | 195R14C | E/10PR | 110/108Q | 11.3 | 5.5J | 7.8 | 26.2 | 2335/2205 | 77 | TL |
| | 205R14C | D/8PR | 109/107Q | 12.0 | 6.0J | 8.2 | 27.0 | 2270/2150 | 65 | TL |
| | 205R14C | E/10PR | 113/111Q | 12.0 | 6.0J | 8.2 | 27.0 | 2535/2405 | 77 | TL |
| | 215R14C | D/8PR | 112/110Q | 12.0 | 6.0J | 8.6 | 27.6 | 2470/2335 | 65 | TL |
| 15" | 195R15C | D/8PR | 106/104R | 11.3 | 5.5J | 7.8 | 27.2 | 2095/1985 | 65 | TL |
| | 215R15C | D/8PR | 112/110Q | 12.0 | 6.0J | 8.6 | 28.5 | 2470/2335 | 65 | TL |
| | 205/70R15C | D/8PR | 106/104R | 11.3 | 6.0J | 8.2 | 26.3 | 2095/1985 | 65 | TL |
| | 205/70R15C | E/10PR | 108/106Q | 11.3 | 6.0J | 8.2 | 26.3 | 2205/2095 | 77 | TL |
| | 215/70R15C | D/8PR | 109/107R | 11.3 | 6.5J | 8.7 | 26.9 | 2270/2150 | 65 | TL |
| | 225/75R15C | D/8PR | 116/114Q | 11.3 | 6.0J | 8.8 | 28.3 | 2755/2600 | 69 | TL |
| 16" | 215/65R16C | D/8PR | 109/107R | 11.3 | 6.5J | 8.7 | 27.0 | 2270/2150 | 69 | TL |
| | 235/65R16C | F/12PR | 121/119R | 11.3 | 7.0J | 9.4 | 28.0 | 3195/3000 | 83 | TL |
| | 215/70R16C | C/6PR | 108/106T | 11.3 | 6.5J | 8.7 | 27.9 | 2205/2095 | 54 | TL |



RADIAL ST-100



Benefits and Features

- Double steel belts for enhanced strength helping puncture resistance and vehicle towing stability
- Long-life and low rolling resistance compound to offer long original treadwear and to promote fuel economy
- Full nylon cap available in all sizes for improved tire strength and durability

M+S

| | |
|--------------|---------|
| Rim Size | 13 - 16 |
| Series | 75 - 85 |
| Speed Rating | M |

RADIAL ST-100

| Rim (inch) | Size | LR/PR | Service Index | Tread Depth (32nd) | Standard Rim | Section Width (inch) | Overall Diameter (inch) | Max. Load (lbs) | Max. Air Pressure (psi) | TT/TL |
|------------|-------------|--------|---------------|--------------------|--------------|----------------------|-------------------------|-----------------|-------------------------|-------|
| 13" | ST175/80R13 | C/6PR | 91/87M | 9.4 | 5.0J | 7.0 | 24.0 | 1360/1200 | 50 | TL |
| | ST205/75R14 | C/6PR | 100/96M | 9.8 | 5.5J | 8.0 | 26.1 | 1760/1570 | 50 | TL |
| 14" | ST205/75R14 | D/8PR | 105/101M | 9.8 | 5.5J | 8.0 | 26.1 | 2040/1820 | 65 | TL |
| | ST215/75R14 | C/6PR | 102/98M | 9.8 | 6.0J | 8.5 | 26.7 | 1870/1650 | 50 | TL |
| | ST215/75R14 | D/8PR | 108/103M | 9.8 | 6.0J | 8.5 | 26.7 | 2200/1930 | 65 | TL |
| | ST205/75R15 | C/6PR | 101/97M | 9.8 | 5.5J | 8.0 | 27.1 | 1820/1610 | 50 | TL |
| 15" | ST205/75R15 | D/8PR | 107/102M | 9.8 | 5.5J | 8.0 | 27.1 | 2150/1870 | 65 | TL |
| | ST225/75R15 | C/6PR | 107/102M | 10.3 | 6.0J | 8.8 | 28.3 | 2150/1870 | 50 | TL |
| | ST225/75R15 | D/8PR | 113/108M | 10.3 | 6.0J | 8.8 | 28.3 | 2540/2200 | 65 | TL |
| | ST225/75R15 | E/10PR | 117/112M | 10.3 | 6.0J | 8.8 | 28.3 | 2830/2470 | 80 | TL |
| | ST235/80R16 | E/10PR | 124/120M | 10.3 | 6.5J | 9.3 | 30.8 | 3520/3080 | 80 | TL |
| 16" | ST235/85R16 | E/10PR | 125/121M | 10.3 | 6.5J | 9.3 | 31.7 | 3640/3200 | 80 | TL |

ARISUN



www.arisuntires.com



ZHONGCE RUBBER GROUP CO., LTD.



www.zc-rubber.com



www.facebook.com/zcrubber



www.twitter.com/zc_rubber



www.linkedin.com/company/zcrubber